



SELF-SUPPORTING DECK ROOF

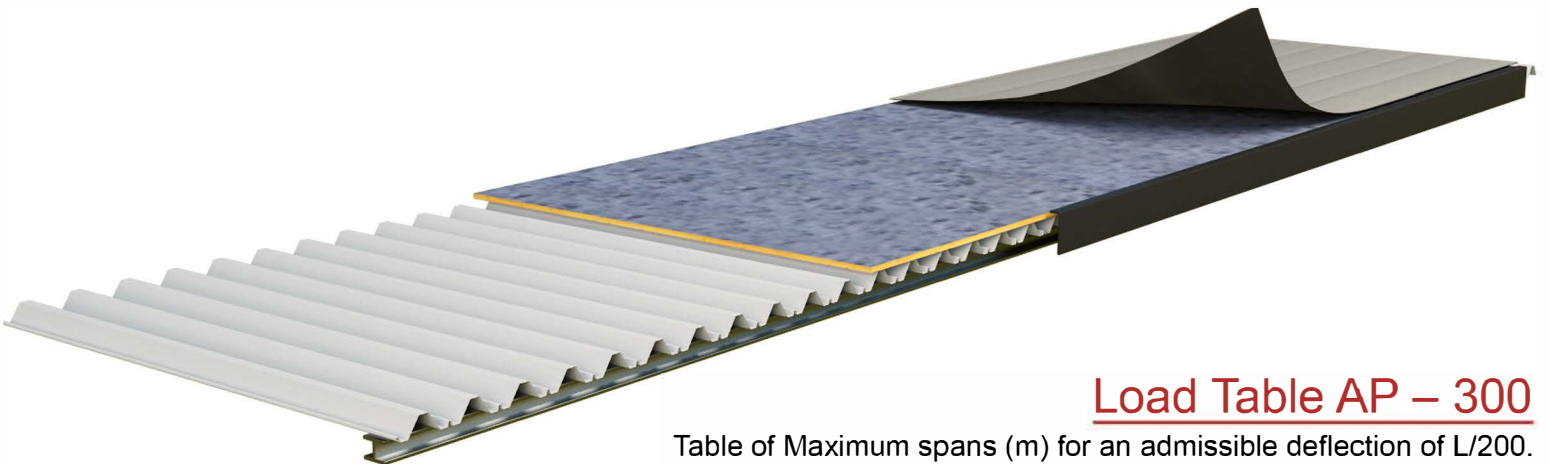
Load Table AP – 250

Table of Maximum spans (m) for an admissible deflection of L/200.

Load (KN/m ²)										
	Thickness (mm)									
	0.80	0.90	1.00	1.25	1.50	0.80	0.90	1.00	1.25	1.50
1.00	8.55	9.05	9.51	10.60	11.60	11.42	12.09	12.70	14.16	15.49
1.25	7.94	8.40	8.83	9.84	10.77	10.60	11.22	11.79	13.14	14.38
1.50	7.47	7.91	8.31	9.26	10.13	9.97	10.56	11.09	12.37	13.53
1.75	7.09	7.51	7.89	8.80	9.63	9.47	10.03	10.54	11.75	12.86
2.00	6.79	7.19	7.55	8.41	9.21	9.06	9.60	10.08	11.24	12.30
2.25	6.52	6.91	7.26	8.09	8.85	8.71	9.23	9.69	10.80	11.82
2.50	6.30	6.67	7.01	7.81	8.55	8.41	8.91	9.35	10.43	11.41



If you need any clarification regarding the present document, please contact the Technical Department at the email apimet@apimet.com

In any case, APIMET CONTRUCCIONES AUTOPORTANTES SL reserves the right to make changes to the present document without prior notice.



Load Table AP – 300

Table of Maximum spans (m) for an admissible deflection of L/200.

Load (KN/m ²)										
	Thickness (mm)									
	0.80	0.90	1.00	1.25	1.50	0.80	0.90	1.00	1.25	1.50
1.00	11.89	12.54	13.48	14.73	16.07	15.87	16.74	18.00	19.66	21.45
1.25	11.04	11.64	12.52	13.67	14.92	14.74	15.54	16.71	18.25	19.92
1.50	10.38	10.95	11.78	12.86	14.04	13.87	14.63	15.73	17.18	18.74
1.75	9.86	10.41	11.19	12.22	13.33	13.17	13.89	14.94	16.32	17.80
2.00	9.44	9.95	10.70	11.69	12.75	12.60	13.29	14.29	15.61	17.03
2.25	9.07	9.57	10.29	11.24	12.26	12.11	12.78	13.74	15.01	16.37
2.50	8.76	9.24	9.93	10.85	11.84	11.71	12.34	13.27	14.49	15.81

If you need any clarification regarding the present document, please contact the Technical Department at the email apimet@apimet.com

In any case, APIMET CONTRUCCIONES AUTOPORTANTES SL reserves the right to make changes to the present document without prior notice.

THERMAL CHARACTERISTICS

Thickness (mm)	80	90	100	110	120	130	140	150
Thermal resistance (m ² x K/W)	2.95	3.30	3.70	4.05	4.60	5.00	5.35	5.75